


# LOUVOLITE PERFECT FIT® SYSTEM PLEATED BLIND WITH OPERATING HANDLE

Max width: 1.4m  
Max drop: up to 2m (fabric dependant)  
Max area: up to 2.8m<sup>2</sup> (fabric dependant)

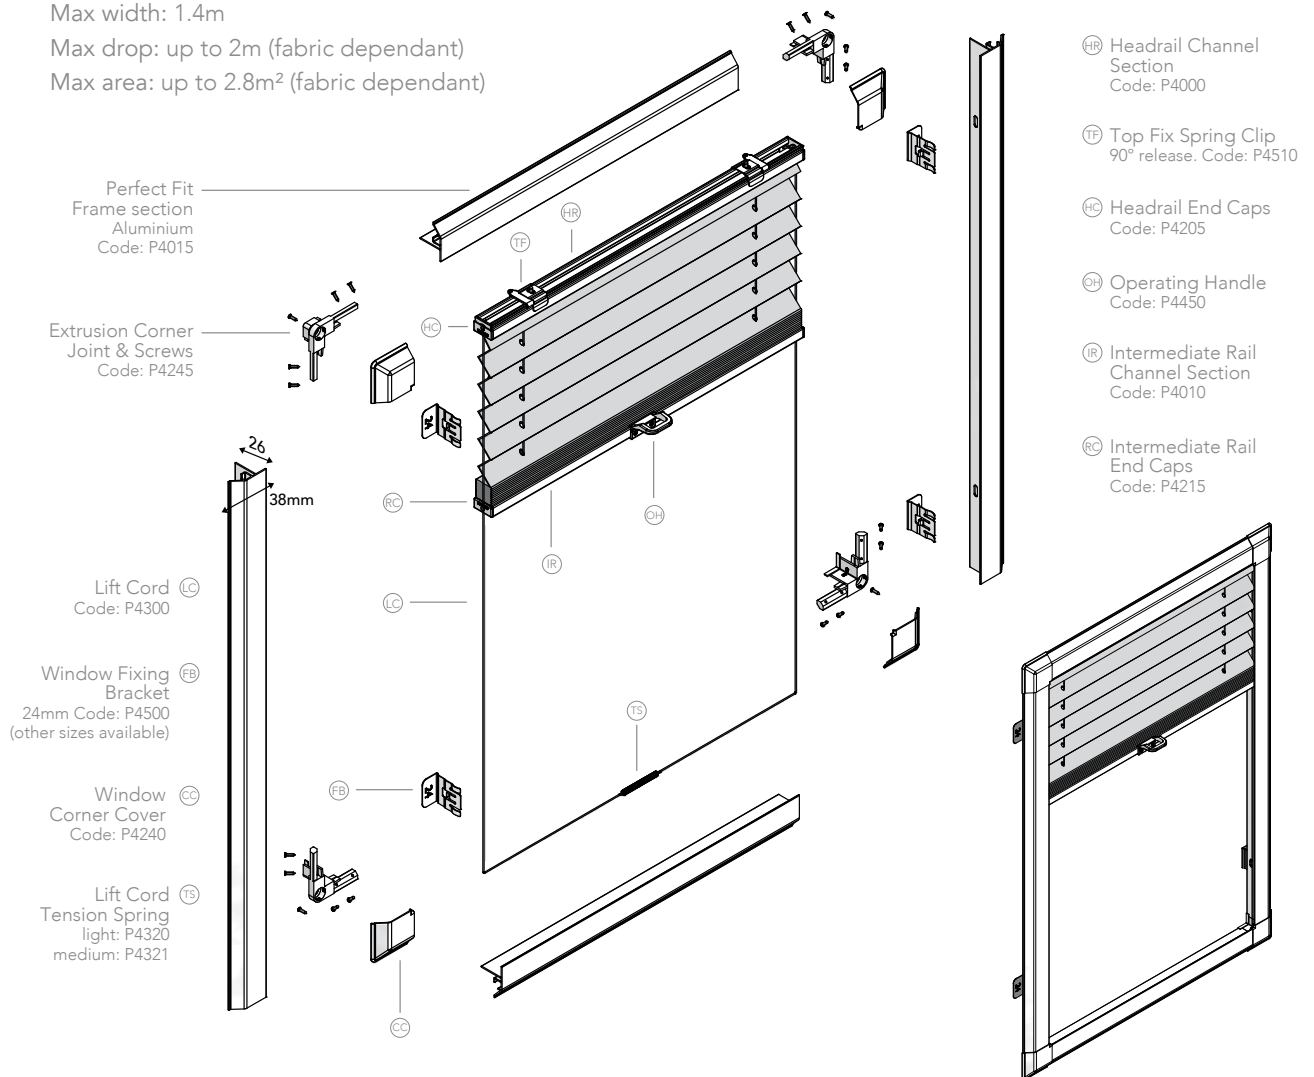

- Designed and manufactured in the UK, all Louvolite systems are 10 year life cycle tested to ensure long lasting performance.
- The blind is housed within a neat frame that clicks into uPVC windows and doors and moves with them when they are opened, tilted or closed.
- No drilling or screwing needed for installation, the frames just click on using the window fixing brackets and can easily be removed for cleaning.
- Reduces the gaps and light strike at the edge of the blind.
- 18mm, 20mm, 22mm, 24mm, 30mm and 38mm brackets to suit most window bead depths.
- The cord tensioning system keeps the blind located within the side channel and off the window.
- Manufactured using high quality engineering grade polymer and aluminium.
- Features a manual operating handle and detached 2m operating wand with twist lock.
- For blinds up to 1.4m wide.
- Colours available: Frame Section: white, anodised, brown, anthracite grey, golden oak, mahogany and matt grey; Headrail: white, silver, tan, brown and anthracite grey; Headrail end caps: white, light grey and brown; Intermediate rail and end caps: white and brown; Window corner cover: white, grey, tan, brown and anthracite grey.

# HARDWARE SPECIFICATION

## Perfect Fit Pleated System

Our pleated blinds are manufactured using the Louvolite pleated blind mechanism with specifically designed 20mm headrail and intermediate rails.

The fabrics are secured into the Head & intermediate rails with aluminium slatting.

The end caps are moulded using UV stabilised Nylon 6 with brass eyelets to ensure minimum wear on the parts

under use.

All fixing brackets for the Perfect Fit system are manufactured from hardened spring steel, these are zinc plated for protection and can be powder coated in the standard colours to compliment the Perfect Fit frame profile.

## Performance

To ensure a positive performance all louvolite Perfect Fit systems are

designed and manufactured in the UK using prime quality plastic and high grade spring steels.

The Perfect Fit frame clips into position using our patented spring brackets that come in various sizes to accommodate the window and door systems available within the market.

## Operation

Perfect Fit systems are 'Safe by design' and comply with BS EN 13120.

## Maintenance

All of the Perfect Fit pleated blind system components are manufactured using aluminium, treated steel and plastic. They do not present any corrosion problems in normal environments. The system has been designed for a smooth operation, together with a rigidity to prolong the window blind's working life.



Your Louvolite Perfect Fit® Distributor:



**UK MANUFACTURED**

[www.louvolitecommercial.com](http://www.louvolitecommercial.com)

|                                     |   |  |  |
|-------------------------------------|---|--|--|
| CI/SIB 1976 reference by SFB Agency |   |  |  |
| (76.7)                              | X |  |  |
|                                     |   |  |  |

S251302 07.19